


Installation Guidelines

Hydraulic master cylinders are safety components that require proper installation to function correctly. We recommend **professional installation** with the following guidelines:



- Do NOT bend or twist brake fluid line.
- Double check mounting bolt threads for wear.
- Check factory torque settings when tightening.

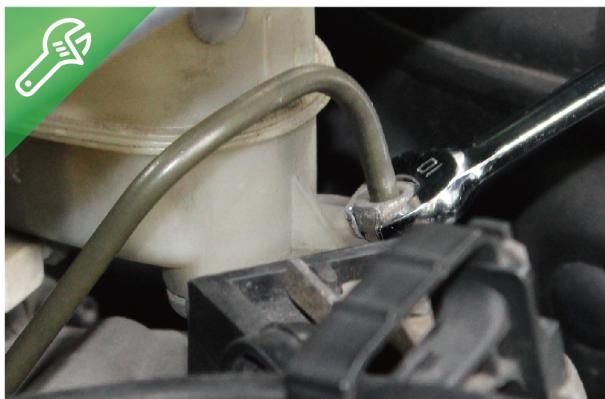

- Use only **New & Factory Approved** brake fluid. E.g., DOT 4, SAE J1704, ISO 4925.
- ⚠ Serious malfunction can occur by using improper brake fluid.



- Bleed brakes properly according to factory guidelines.
- Check brake pedal position and confirm positive pedal response.
- **Make sure brake fluid level is above MIN level.**



- Brake fluid absorbs moisture and oxygen over time, use brake fluid tester periodically to insure maximum braking performance.
- ⚠ If moisture level exceeds 4%, replace brake fluid immediately according to factory procedures and specifications.



NAKAMOTO demonstrates a simple inspection method to support an initial check of hydraulic airtightness and early-stage assessment.

See our inspection tutorial:

